

A
Black & Decker®

Power Tool Box Q-6

Air Tools



Greatest values ever offered in quality air tools!

Rec'd. 12/1/67

Black & Decker brings air tools down to earth

**Tool for tool, Black & Decker quality products
give you more value per dollar.**

Sometimes surprisingly more. It will pay you to
compare Black & Decker prices against your
air tool job applications.

**Tool for tool, Black & Decker offers the
highest quality and performance.**

Greater power, maximum service life, superior
working comfort... these are just a few of the
advantages you'll find in every Black & Decker
air tool. Compare them.

**Black & Decker Air Tools are sold by your local
industrial distributor...**

right from his warehouse. There's no need to wait.
Black & Decker Air Tools are instantly available...
all over the country.

**Black & Decker air tool users get the best
efficient local service...**

from the largest network of power tool service
facilities in the world.

For value... Quality... and Service

You can expect the best from Black & Decker





Drills

Give Black & Decker's new compact drills a trial on the toughest manufacturing and maintenance jobs you've got. Find out fast why they're the greatest quality value ever offered! □ All the features of high priced drills including *oversize ball & sleeve bearings, precision gearing, hardened & ground end plates, and built in air regulator and oiler*. □ Industrial duty chucks for solid precise bit retention and minimum drill bit wear. □ Built-in air regulator controls speed with no loss in stall torque. □ Exclusive design of their comfort, palm-sized housings gives you grip and trigger control in any position. Puts air power to work in the


toughest quarters. □ Built-in oiler, for day-long metered lubrication each time the tool starts. □ Rear exhaust—blows away from finished work. □ Baffle & muffler, built into the handle lowers exhaust noise. □ Tangential blade design plus precision planetary gearing delivers five & one-half foot pounds of twisting energy in model 861, and over sixteen foot pounds of torque in the 862. The $\frac{3}{8}$ " capacity No. 862 Drill is equipped with a position-adjustable side handle for right or left hand use . . . to absorb the power and high torque produced by this tool.



Cat. No. 861— $\frac{1}{4}$ " \$64.00



Cat. No. 862— $\frac{3}{8}$ " \$79.00

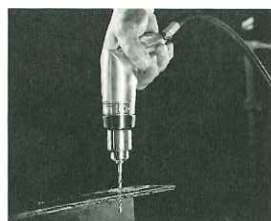

Drilling in steel



Drilling in wood



Model 862 with standard adjustable side handle

Specifications

Cat. No.	Free RPM	Cap. Steel	Hardwood	Chuck Cap.	Length	Spindle Offset	Air Inlet FPT	Weight	Shipping Weight
861	2200	$\frac{1}{4}$ "	$\frac{1}{2}$ "	$\frac{1}{4}$ "	7"	$\frac{7}{8}$ "	$\frac{1}{4}$ "	2 lbs. 6 oz.	3 lbs.
862	900	$\frac{3}{8}$ "	$\frac{3}{4}$ "	$\frac{3}{8}$ "	$7\frac{5}{8}$ "	$1\frac{1}{16}$ "	$\frac{1}{4}$ "	2 lbs. 12 oz.	$3\frac{1}{4}$ lbs.

Standard Equipment:

No. 861—No. 23762 (7B) Geared Chuck, Chuck Key, No. 60538 Bottle "Moisture Gard" oil.

No. 862—No. 26299 Geared Chuck and Chuck Key, No. 63298 Side Handle, and No. 60538 "Moisture Gard" oil.

Midget Die Grinder

Whether you need power, speed, or slim line control to meet the exacting performance required in tool rooms, die shops . . . or the rough demand of foundry clean-up, you get it in Black & Decker's new 551 Midget Die Grinder . . . at only \$69.00. Rugged and precise, the 551 is built to deliver the maximum cutting performance inherent in modern abrasives, carbide burrs, and rotary files. Hundreds of machine and die shops, foundries and general manufacturing plants use the dependable 551 for polishing, grinding, deburring, and removal of parting lines and flash. Mount it in a tool post holder for I.D. & O.D. grinding. Top quality industrial duty features include:


- Selected three-bearing construction—two precision shielded bearings at work-end of spindle for true running sturdy support.
- Solid steel housing, yet the grinder weighs only a fraction over one pound.
- Hardened, chrome one-piece spindle for minimum side thrust deflection.
- True running built-in collets, with choice of standard $\frac{1}{4}$ ", $\frac{1}{8}$ " or $\frac{3}{16}$ " sizes.
- Black & Decker floating, self-centering motor.
- Tangential blades for greater power, longer wear.
- Full 360 degree adjustment of exhaust deflector, instant selection of air flow.



Cat. No. 551 \$69.00



Model 551 Collet
 Use No. 718519 Collet Sleeve with collets listed below
 No. 718520 $\frac{1}{4}$ " Capacity
 No. 718523 $\frac{1}{8}$ " Capacity
 No. 718524 $\frac{3}{16}$ " Capacity
 No. 718455 Collet Wrench
 No. 718456 Collet Wrench
 No. 718518 Tool Post Holder

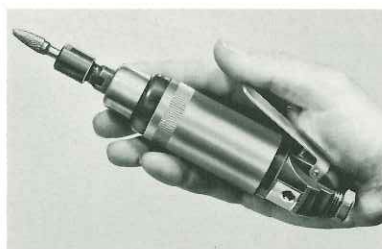

Tool Post Holder No. 718518 \$12.60



Collet Wrench No. 718455 \$.50



Collet Wrench No. 718456 \$.55

Specifications

Cat. No.	Free RPM	Organic Wheels	Capacity Max. Burr Dia.	Wire Brush	Side to Center	Length	Weight	Air Inlet	Shipping Weight
551	23,000	$1\frac{1}{2}$ "	1"	$1\frac{1}{2}$ "	$1\frac{1}{16}$ "	$6\frac{5}{8}$ "	1 lb. 3 oz.	$\frac{1}{4}$ "	1 lb. 10 oz.

Standard Equipment: No. 718455 and No. 718456 Collet Wrenches, No. 718519 Collet Sleeve, and No. 718520 $\frac{1}{4}$ " capacity collet body.

Optional Equipment: (in place of $\frac{1}{4}$ " collet body) No. 718523 $\frac{1}{8}$ " collet body, or No. 718524 $\frac{3}{16}$ " collet body.

Power Chisels

HEAVY DUTY AND SUPER DUTY POWER CHISELS.

Durability that can't be beat! Versatility for production & maintenance! Put these tools to work at anything from scraping spilled printer's ink to driving roll pins on an assembly line. Operators love them. For 4 years they've proved themselves in welding and fabricating shops—removing flux and slag. In maintenance and construction work they clean up rust, scale, paint . . . chip spilled material . . . hardened cement from forms and concrete mixers. They'll cut intricate curves or straight line trim on panels. They'll form, pierce and crimp on sheet metal jobs. They'll prove their versatility . . . give them a trial! □ High strength, extra life

alloy steel barrel. □ Built-in air regulator gives precise control, wide versatility. □ Human engineered handle for operator comfort, easy control. □ Exclusive two finger no-pinch trigger for operator comfort. Less fatigue, no finger blisters. □ Feathering type throttle valve aids in starting chisel into material. For safety and greater tool control. □ Exclusive interlock quick-change tool retainer for safety. Chisels can be changed without removing spring retainer. □ Replaceable hardened steel chisel bushing for extra working life. Worn bushing can be replaced instead of entire barrel. □ Locknut collar is positive barrel retainer. Barrel will not loosen after prolonged use.




Cat. No. 850—Heavy Duty. \$75



Cat. No. 855—Super Duty. \$95

For top performance use these Tru-Stroke* precision-forged accessories with Black & Decker power chisels.

A. No. 55417 Sheet Metal Cutter	4.95	H. No. 55430 Chisel Blank	3.75
B. No. 55418 Panel Cutter	4.95	I. No. 55434 Panel Crimper	16.75
C. No. 55420 Rivet Cutter	4.60	J. No. 55527 No. 6 Piercing Punch	4.80
D. No. 55421 Scraper	4.80	No. 55528 No. 8 Piercing Punch	4.80
E. No. 55422 Tapered Punch Breaker	3.75	No. 55529 No. 10 Piercing Punch	4.80
F. No. 55424 Spot Weld Cutter	4.80	K. No. 55533 Beehive Spring	1.25
G. No. 55427 5" Nut & Bolt Cutter	4.80	L. No. 58616 Quick Change Spring	1.95
No. 55429 9" Nut & Bolt Cutter	4.80		

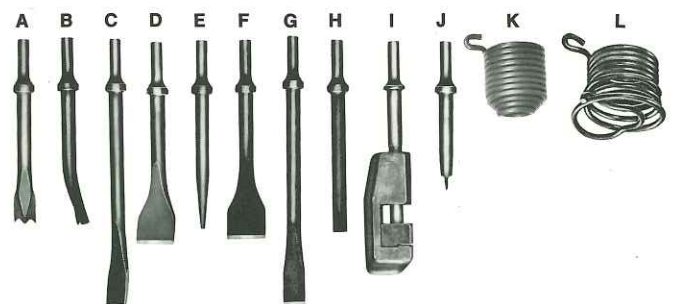

See Price List for Quantity Prices

*Trademark of The Black and Decker Manufacturing Company

Specifications

Model	Weight	Length	Bore	Stroke	Blows Per Minute	Side to Center	Air Inlet FPT	Shipping Weight
850	3 lbs. 6 oz.	6 $\frac{3}{4}$ "	$\frac{3}{4}$ "	1 $\frac{1}{16}$ "	4300	1 $\frac{1}{4}$ "	$\frac{1}{4}$ "	3 lbs. 14 oz.
855	4 lbs.	7 $\frac{1}{8}$ "	$\frac{3}{4}$ "	2 $\frac{1}{16}$ "	3000	1 $\frac{1}{4}$ "	$\frac{1}{4}$ "	4 lbs. 2 oz.

Standard Equipment: No. 58616 Quick Spring Retainer, and built-in Air Regulator.

Optional (at extra cost): Tru-Stroke* Chisels and Accessories shown.

Impact Wrenches

1/2" Capacity Heavy Duty.

This is the 1/2" bolt size impact wrench that set new performance records for the air tool industry. Proved on tough jobs for 6 years. Now it's yours for only \$165.00! For general manufacturing and maintenance work . . . assembly line bolting of 3/8"-1/2" bolts . . . running lag bolts on crates . . . repair bolting . . . the 766 has proved its power and durability. Users talk about the "fine, sturdy impact" . . . "excellent life and performance" . . . "have 165 of them in use and love them" . . . "far more powerful and durable than competition." Take the 766 out on your job! ☐ Rugged drive shank with spring ring retainer, for quick, easy socket change. ☐ Full ball bearing construction—long tool life, more efficient power output. ☐ Built-in rubber bumper protects nose of tool from damage. ☐ Impact mechanism runs in oil bath. Full-time lubrication gives the impactor long life with low maintenance. ☐ Slide bar reverse protected from breakage. Longest-lived reverse valve that can be put into an air tool. Convenient. Low maintenance. ☐ Steel inlet bushing for durability and long life. ☐ Built-in oiler gives motor full-time lubrication. ☐ Built-in air regulator for full power control, versatility. ☐ Baffled exhaust—quiet running.



Cat. No. 766 \$165

3/4" Capacity Heavy Duty.

Designed for long, low-maintenance working life on big jobs. Fast and versatile! Superior design and power-packed light weight make it possible to do heavy jobs one-handed with the 773! Draw-up assembly work on chassis for off-the-road equipment, trucks and trailers. 5/8"-3/4" H.T. bolting in steel, utilities, shipyard, oil fields and railroad repair. Compressing spools of cable. Tightening cables in concrete. The 773 has proved itself in refineries, foundries, boiler maintenance and pressurized wood treating work. Take it out on a job today! ☐ Exclusive ring stop and bull ring socket retainer for long spindle life and easy socket removal. ☐ Built-in rubber nose protected for long tool life and low maintenance. Leather boot is available. ☐ Ball and cam impact mechanism, no springs, no gears . . . no lost motion. ☐ Protected reversing valve cannot be accidentally reversed while in use. ☐ Built-in air regulator for versatility. ☐ No pinch two-finger trigger for operator comfort and greater tool control.



**Cat. No. 773
and 773x \$365.00**

**Cat. No. 773-6
and 773-6x \$375.00**

No. 773-6 Extension Shank

Specifications

Cat. No.	Drive Shank	Throttle	Length to Socket	Weight Lbs.-Oz.	Side to Center	Bolt Size	Torque Range Foot-Lbs.*	Free RPM	Blows Per Minute	Air Inlet F.P.T.	Shipping Weight Lbs.-Oz.
766	1/2" Sq. Drive	Pistol Type	7"	6-0	1 1/2"	1/2"	30-125	6000	1500	1/4"	7-6
773	3/4" Sq. Drive	Pistol Type	7 3/8"	10-0	2"	3/4"	100-300	6900	1150	3/8"	10-12
773-6	3/4" Sq. Drive 6" Ext.	Pistol Type	13 3/8"	10-6	2"	3/4"	100-250	6900	1150	3/8"	11-2
773X	3/4" #4 Spline Dr.	Pistol Type	7 3/8"	10-0	2"	3/4"	100-300	6900	1150	3/8"	10-12
773-6X	3/4" #4 Spline Dr. 6" Ext.	Pistol Type	13 3/8"	10-6	2"	3/4"	100-250	6900	1150	3/8"	11-2

Standard Equipment: One No. 60538 4 oz. bottle "Moisture Gard" Air Motor Oil


*Torque to be obtained in 4 seconds

Impact Wrenches

One Inch Capacity, Torque Range 250 to 1000 foot pounds—Weight 21 lbs. The best value on the market for $\frac{3}{4}$ " and 1" high tensile bolting. Up to $1\frac{1}{4}$ " capacity on low tensile bolts. For truck, farm machinery, bridge construction, railroad and bus maintenance shops. Equipped with a big work glove sized end handle and a choice of drive shanks, the No. 775 has a fast 4000 RPM run-down speed and an impact rate of 800 blows per minute. □ Choice of spindles 1" Square Drive, 1" Square with 6" extension or 1" No. 5 spline drive, and 1" No. 5 spline with 6" extension. □ Simplified, durable impact mechanism with but five major parts is designed for long, trouble-free service in tough industrial applications. □ Outside thumb throttle for instant "off-on" control. □ Quick acting maintenance-free slide bar reverse. □ Adjustable exhaust deflector for operator comfort. □ Equipped with moveable side handle for safe two-hand control.



No. 775-6 Extension Shank

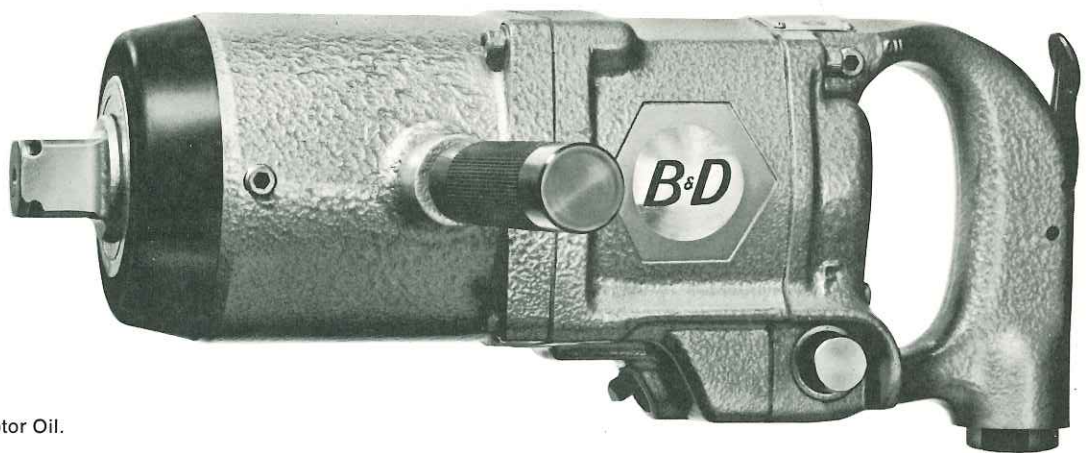

Standard Equipment:

Steel Side Handle,
Suspension Bail,
6 Ft. Hose Whip,
One 4 oz. bottle
No. 60538 "Moisture Gard" Air Motor Oil.

Cat. No. 775 and 775x \$520.00

Cat. No. 775-6 and 775-6x \$530.00

Specifications

Model No.	Drive Shank	Throttle	Length to Socket	Weight Lbs.-Oz.	Side to Center	Bolt Size	Torque Range Ft.-Lbs.	Free RPM	Blows Per Minute	Air Inlet FPT	Shipping Weight Lbs.-Oz.
775	1" Sq. Dr.	Thumb	13 $\frac{1}{4}$ "	21-0	2 $\frac{3}{16}$ "	1 $\frac{1}{4}$ "	250-800	4000	800	$\frac{3}{8}$ "	24-0
775-6	1" Sq. Dr. 6" Ext.	Thumb	19 $\frac{1}{4}$ "	21-8	2 $\frac{3}{16}$ "	1 $\frac{1}{4}$ "	250-700	4000	800	$\frac{3}{8}$ "	24-8
775-X	1" Spline	Thumb	13 $\frac{1}{4}$ "	21-0	2 $\frac{3}{16}$ "	1 $\frac{1}{4}$ "	250-1000	4000	800	$\frac{3}{8}$ "	24-0
775-6X	1" Spline 6" Ext.	Thumb	19 $\frac{1}{4}$ "	21-6	2 $\frac{3}{16}$ "	1 $\frac{1}{4}$ "	250-900	4000	800	$\frac{3}{8}$ "	24-8




Accessories

- A. No. 33345 $\frac{1}{2}$ " Sq. Dr. Quick Change Chuck 18.15**
B. No. 45429 3-jawed Chuck $\frac{1}{2}$ " Sq. Dr. Cap. $\frac{1}{8}$ " to $\frac{1}{2}$ " Shanks 10.90
C. No. 50956 Leather Protector For No. 766 Wrench 2.25
No. 62859 Leather Protector For No. 773 Wrench 2.75
No. 51330 1 lb. can Impact Wrench Grease for Model 775 1.65

Orbital Sander

Fast, powerful, compact—the lightest weight industrial orbital sander you can buy! Get your hands on it and try it. Only $3\frac{5}{8}$ " high . . . weighs just $2\frac{3}{4}$ lbs. The 790 is a powerful sanding *hand*! Lets you work right up to a vertical surface. Thick pad lets you use the corner for sanding small areas. Light weight makes vertical surface sanding easy. The 790 is the best-liked sander in its class for paint touch up work, paint preparation, white sanding and pattern sanding. □ All moving parts are balanced for smooth vibration-free operation. □ 25 fewer parts than other sanders in its class. Low maintenance. Easy servicing. □ Palm fitting throttle and finger-fitting housing. Use it with comfort and full control. □ Spring steel paper clamp holds up to eight 3" x 8" sheets. Four sheets can be cut from standard 9" x 11" paper. □ Optimum $\frac{3}{16}$ " orbit and speed gives best combination of material removal and finishing. □ Toboggan front protects vertical surfaces and can be used for spot sanding. □ Hardened steel end plates and liner assure long motor life.

Palm fitting . . . small . . . light? Here is graphic proof. Note how this tiny but powerful sander is dwarfed by a normal hand. Gets you right down to the work.

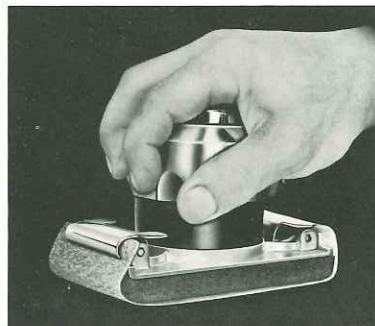


Cat. No. 790 \$69

Specifications

Cat. No.	Weight	Length	Height	Width	Orbit Dia.	Orb./Min. at 90 P.S.I.	Paper Size	Air Inlet FPT	Hose Size	Shipping Weight
790	$2\frac{3}{4}$ lbs.	$5\frac{1}{2}$ "	$3\frac{5}{8}$ "	$3\frac{3}{16}$ "	$\frac{3}{16}$ "	5400	3" x 8"	$\frac{1}{4}$ "	$\frac{1}{4}$ "	3 lbs. 8 oz.

Fine Finishing R.O.* Sander

Gives twice the finish . . . twice as fast . . . as any other orbital or straight line sander! The light, compact 805 has proved its finishing and sanding superiority in hundreds of fiberglass, metal, wood and marble applications. It beats old-fashioned methods as much as 5 to 1 in metal, paint, or rust removal, feather edging, and pre-paint finishing. Random orbit action produces fine finish sanding at disc sander speed. Counterbalanced eccentric makes the abrasive disc move in two constantly changing directions at the same time—12000 times a minute! Since the abrasive pattern is never repeated the resulting finish is smooth, even, free of swirl marks . . . fine as skillful hand sanding. □ Double row sealed platen bearings. Smooth operation. Long tool life. □ Palm fitting housing for control and comfort. □ Hardened steel motor parts for durability. □ Feathering throttle gives precise control. Finger contoured handle for operator comfort. □ Built-in air regulator may be operated while tool is running. Gives speed and finishing control. □ Specially bonded foam pad with duck backing for long pad life. Easy paper removal.

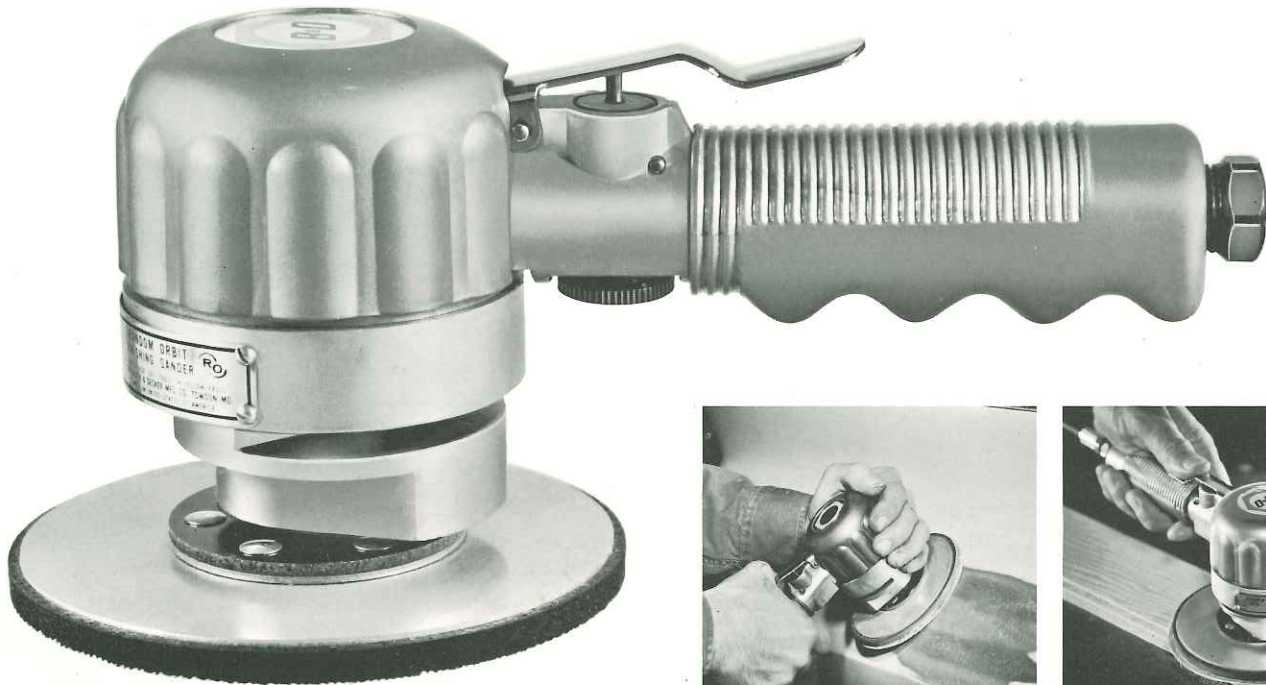

Cat. No. 805 \$85.00

No. 57435 5" R.O. Sanding Pad 4.25

No. 57436 6" R.O. Sanding Pad 4.25



*Trademark of The Black and Decker Manufacturing Company

Specifications

Cat. No.	Free RPM	Sanding Pad Dia.	Weight	Length	Height	Side to Center	Air Inlet	Shipping Weight
805	12,000	5"	3 lbs. 6 oz.	8½"	4⅝"	1½"	¼"	4 lbs. 8 oz.

Standard Equipment: No. 57435 Pad Assembly, ⅛" Hex Wrench

ScruGun® Screwdrivers

Check out these brand new Scruguns for price, quality, power and durability . . . they're the new pace setters in compact industrial fastening tools, setting records in automotive, appliance, furniture, and general assembly operations. Black & Decker brings air power down to earth with high performance industrial tools at a right price. There's ample power for a wide range of fastener sizes . . . five foot pounds of torque in the No. 861 and over 13 foot pounds with the rugged No. 862. Want slower speeds? Simply adjust the built-in air regulator. Lower torque? Just lower the pressure at the air line regulator. Check these Black & Decker features—and put the Scruguns to

work. □ Positive action, quick-change chuck. Firmly held bits. Can be changed in just seconds. □ Direct drive—no clutch to wear. □ Compact design. Work in close spots. □ Shielded, no-pinch trigger for comfort. □ Built-in air regulator for speed and torque control. □ Built-in oiler gives full-time lubrication. □ Rear exhaust blows away from work. □ Built-in muffler. Low noise level. □ Non-slip finish. Easy to hold. □ Contoured housing design for comfort in any position. □ Oversize bearings, hardened precision gearing for long industrial life. □ Side handle is standard equipment with model 862-PN-9.



Cat. No. 861 PN-22
2200 RPM \$64.00



Cat. No. 862 PN-9
900 RPM \$79.00

Specifications

Cat. No.	Free RPM	Speed at Peak HP	Wood Screw in oak	CAPACITY Thread Cutting Screws	Machine Screws	Stall Torque @ 90 P.S.I.	Length Inches	Side to Center	Net Weight	Shipping Weight
861-PN-22	2200	1100	No. 10	1/4"	1/4"	5 ft. lbs.	6 1/8"	7/8"	2 lb.	2 lb. 10 oz.
862-PN-9	900	450	No. 18	3/8"	5/8"	13 ft. lbs.	6 3/8"	1 1/8"	2 lb. 3 oz.	3 lb.

Standard Equipment: No. 60538 4 oz. bottle "Moisture Gard" oil, Hex Oiler Key. Position adjustable side handle with Model 862PN-9.

Screwdriver—Nutrunner Accessories

	Part No.	Length	Screw Size	Price
A. 1/4" Hex Bit & Finder Assembly For Slotted Head Screws	17690	2 3/4" Bit & Finder	4-5	\$3.45*
	13356	2 3/4" Bit & Finder	6-7-8	2.75*
	18593	2 3/4" Bit & Finder	9-10	3.45*
	21731	2 3/4" Bit & Finder	No. 12 & 1/4"	3.45*
B. 1/4" Hex Shank Power Bits	54592	1 1/8" Phillips No. 2		.90*
	54594	1 1/8" Phillips No. 3		1.00*
	61098	1 1/8" Posidriv® No. 2		1.55*
	61100	1 1/8" Posidriv® No. 3		1.55*
C. 1/4" Bit Tip Holder 1/4" Hex Shank	61108	2 1/8" Non-Magnetic		2.20*
	63957	2 1/8" Magnetic		6.75
D. 1/4" Hex Shank Bit Tips	61102	No. 2 Posidriv® (Sheet Metal, Self Tapping Screws)		.60*
	61104	No. 3 Posidriv® (Sheet Metal, Self Tapping Screws)		.60*
	38404	No. 2 Phillips		.55*
	38405	No. 3 Phillips		.55*
	38406	Frearson		.55*
	52058	No. 2 Phillips (Sheet Metal, Self Tapping Screws)		.55*



A.



B.




C.



D.

Screwdriver—Nutrunner Accessories (Cont'd)

	Part No.	Socket Size	Length	Price
E. 6" Bit Extension	22539	6" Bit Extension		\$5.25
F. Nutsetter 1/4" Hex Drive	49278	1/4"	1 3/8" Magnetic	3.60
	61105	1/4"	2 1/16" Non-Magnetic	3.20
	61106	3/16"	2 1/16" Non-Magnetic	3.30
	61107	3/8"	2 1/16" Non-Magnetic	3.60
		Square		
		Hex	Drive Length	
G. 1/4" Hex Shank Ext.	20510	1/4" x 1/4"	x 2"	1.65
	20511	1/4" x 1/4"	x 6"	2.35
		Size Hex		
H. Sockets 1/4" Sq. Dr.	38420	1/4"		2.75
(magnetic)	38422	3/16"		2.75
(Illustration)	38424	3/8"		2.75
Sockets 1/4" Sq. Dr.	20512	1/4"		1.00
(Non-Magnetic)	20514	3/16"		1.00
	20516	3/8"		1.00



Air Line Accessories



No. 56030 A small, light air regulator for 1/4" air inlet tools not equipped with built-in regulators, the No. 56030 provides a quick, easy way to precise power control by restricting the volume of air flow to the tool.

\$5.50

Lubricants

No. 60537	4 oz. bottle of air impact wrench mechanism oil	.60
No. 60538	4 oz. bottle "Moisture Gard" oil	.65
No. 60539	1 qt. "Moisture Gard" oil	2.00



No. 61637 Air Filter, 3/8" FPT

13.75



No. 61640 Air Regulator, With Gauge, 3/8" FPT

11.75



No. 61643 Air Lubricator, 3/8" FPT

15.25



No. 61650 Coupler—Fem. Pipe Thread 1/4"

2.75

No. 61651 Coupler—Fem. Pipe Thread 3/8"

3.75



No. 61653 Coupler—Male Pipe Thread 1/4"

2.75

No. 61654 Coupler—Male Pipe Thread 3/8"

3.75



No. 61656 Connector—Fem. Pipe Thread 1/4"

.95

No. 61657 Connector—Fem. Pipe Thread 3/8"

1.25



No. 61659 Connector—Male Pipe Thread 1/4"

.95

No. 61660 Connector—Male Pipe Thread 3/8"

1.25



	I.D. Inches	Length Feet	Fittings MPT	
No. 63593 Hose Whip	1/4"	8	1/4" (2)	3.75
No. 63594 Hose Whip	3/8"	8	3/8" (2)	3.75



No. 718842 Hose Line Oiler. A small, extremely light air line lubricator ordinarily mounted on the hose whip of air tools having 1/4" pipe thread connections

\$4.95

Black & Decker®

Air Tools

For immediate delivery call your Black & Decker Industrial Distributor. When you specify Black and Decker's challenging new line of air tools you can now draw upon the resources of the finest industrial distributors throughout the nation who have air tools in stock—or a supply line direct to our factory. Chances are you'll be dealing locally with men who have a vital interest in the business and growth of your own community. Their service is immediate and personal, backed by expert knowledge of tool applications and their facilities are one of the reasons why Black & Decker has grown to world leadership in the power tool industry. Now more than ever Black & Decker tools are your best buy . . . and your local distributor is the place to buy them! Black & Decker distributors are listed under "Tools Electric" and "Tools Pneumatic" in Yellow Pages of your Telephone Directory.

FACTORY SALES and SERVICE CENTERS

	Area Telephone Code No.		Area Telephone Code No.
ALABAMA: Birmingham 35233, 1717 Third Ave., South.....	205 324-6691	NEW MEXICO: Albuquerque 87110, 4700 Lomas Blvd. N.E.	505 265-6401
ARIZONA: Phoenix 85007, 537 E. McDowell Rd.	602 AL 8-1332	NEW YORK: Buffalo 14209, 881 W. Delavan Ave.	716 TT 4-6220
CALIFORNIA: Anaheim 92802, 1235 So. Euclid Ave.	714 772-4050	New York 10462, 1894 E. Tremont Avenue (Bronx)	212 SY 2-2700
Los Angeles 90007, 2432 S. Broadway 213	RI 9-0371	New York 10014, 227 Varick St. (Manhattan)	212 WA 9-6450
Oakland 94606, 1107 E. 14th St. 415	TE 4-5944	New York 11377, 56-15 Queens Blvd. (Woodside)	212 DE 5-1042
Sacramento 95814, 1915 Seventeenth Street 916	444-3188	Rochester 14620, 476 Clinton Ave. S. 716	454-3814
San Diego 92105, 3811 El Cajon Blvd. 714	AT 1-3331	Syracuse 13224, 2140 Erie Blvd. E. 315	446-3086
San Francisco 94080, 1139 Airport Blvd. 415	871-7278	NORTH CAROLINA: Charlotte 28206, 1710 W. Graham St.	704 FR 5-3721
Santa Clara 95050, 2291 The Alameda 408	241-9162	Greensboro 27403, 1032 W. Lee Street 919	275-4487
COLORADO: Denver 80204, 675 Kalamath St. 303	222-0621	OHIO: Cincinnati 45203, 1225 Western Ave. 513	421-2275
CONNECTICUT: Hartford 06114, 131 Meadow Street 203	249-6241	Cleveland 44113, 3901 Detroit Ave. 216	OL 1-4243
FLORIDA: Jacksonville 32208, 5224 Pearl Street 904	836-8351	Columbus 43202, 3293 N. High Street 614	AM 8-5797
Miami 33142, 2075 N. W. 54th Street 305	356-2951	Dayton 45420, 617 Watervliet Ave. 513	252-1821
Orlando 32806, 940 So. Orange Ave. 305	NE 3-9839	Solon 44139, 6225 Cochran Road 216	CH 8-5330
Tampa 33609, 3407 S. Dale Mabry Hwy. 813	241-4015	Toledo 43606, 2629 W. Central Ave. 419	475-6771
GEORGIA: Atlanta 30313, 316 Techwood Drive, N.W. 404	JA 4-0431	OKLAHOMA: Oklahoma City 73106, 1717 Linwood Blvd.	405 CE 2-7515
HAWAII: Honolulu 96813, 675 Auahi Street 808	569-374	Tulsa 74114, 202 So. Harvard Street 918	747-1558
ILLINOIS: Chicago 60607, 1100 W. Jackson Blvd. 312	TA 9-3500	OREGON: Portland 97209, 1640 N. W. Johnson Street 503	CA8-8631
Chicago 60646, Lincolnwood, 710 N. Crawford Ave. 312	OR 3-0923	PENNSYLVANIA: Harrisburg 17112, 6070 Allentown Rd.	717 KI 5-0651
Chicago 60655, 10708 S. Western Ave. 312	BE 3-6832	Lancaster 17604, 715 Fountain Ave. 717	EX 3-5831
INDIANA: Evansville 47708, 931 Bond Street 812	425-4269	Philadelphia 19103, 333 No. 20th Street 215	LO 4-5520
Indianapolis 46207, 1125 W. 16th Street 317	632-5569	Pittsburg 15232, 5437 Baum Blvd. 412	362-2700
IOWA: Des Moines 50312, 2811 Ingersoll Ave. 515	CH 4-7257	RHODE ISLAND: E. Providence 02914, 2777 Pawtucket Ave.	401 434-1655
KANSAS: Wichita 67214, 203 N. Mathewson Street 316	FO 3-6571	SOUTH CAROLINA: Greenville 29601, 407 Pendleton St.	803 232-3038
KENTUCKY: Louisville 40221, 4407 Park Blvd. 502	366-1495	TENNESSEE: Knoxville 37917, 1123 North Central St.	615 546-2481
LOUISIANA: New Orleans 70112, 2010 Poydras Street 504	522-2544	Memphis 38106, 921 South Third St. 901	WH 2-3244
MARYLAND: Baltimore 21211, 203 West 28th Street 301	HO 7-7411	Nashville 37210, 533 4th Ave., South 615	254-0110
Baltimore 21205, 4712 Erdman Ave. 301	485-5550	TEXAS: Amarillo 79106, 3008 West 6th Ave. 806	DR 3-1531
Bladensburg 20710, 4501 Baltimore Avenue 301	779-3808	Dallas 75207, 1808 N. Industrial Blvd. 214	RI 1-6401
Towson 21204, 701 E. Joppa Road 301	VA 3-4400	Fort Worth 76104, 1214 So. Main Street 817	ED 6-0175
MASSACHUSETTS: Boston 02135, 12 Market St. (Brighton)	ST 2-6264	Houston 77003, 105 Sampson Street 713	CA 8-7521
MICHIGAN: Detroit 48219, 18133 W. McNichols Rd. 313	534-8880	San Antonio 78210, 1314 S. St. Mary's Street 512	LE 4-4611
Detroit 48234, 11360 East Seven Mile Road 313	527-5010	UTAH: Salt Lake City 84115, 1541 S. Second West 801	HU 6-7056
Grand Rapids 49509, 1296 36th St. S. W. 616	534-7708	VIRGINIA: Falls Church 22046, 129 Annandale Road 703	533-1147
MINNESOTA: Minneapolis 55408, 2815 Nicollet Ave. 612	TA 3-5283	Norfolk 23517, 337 W. 21st Street 703	625-6888
MISSOURI: Kansas City 64108, 2705 McGee Trafficway 816	HA 1-1493	Richmond 23222, 1424 Chamberlayne Ave. 703	649-9245
St. Louis 63110, 615 S. Vandeventer Ave. 314	JE 3-2210	WASHINGTON: Seattle 98109, 434 Eighth Ave., N.	206 MA 3-6442
NEBRASKA: Omaha 68102, 2218 Leavenworth Street 402	345-2330	Spokane 99202, 3025A E. Mission Ave. 509	KE 4-7188
NEW JERSEY: Newark 07104, 868 Broadway 201	HU 3-1076	WEST VIRGINIA: Charleston 25301, 116 Washington St., E.	304 343-0289
WISCONSIN: Milwaukee 53213 6301 Blue Mound Road 414	GR 6-7800		

BLACK & DECKER MFG. CO., Limited, Canada

BROCKVILLE, ONTARIO Brockville Shopping Centre
 CALGARY, ALBERTA 1003 11th Avenue S. W.
 EDMONTON, ALBERTA 11440 Ave.-142 Street
 HALIFAX, NOVA SCOTIA 803 McLean Street
 HAMILTON, ONTARIO 180 Parkdale Ave. N.
 LONDON, ONTARIO Kings Shopping Plaza (972 Hamilton Rd.)
 MONTREAL 10, P. Q. 7865 St. Lawrence Blvd.
 OTTAWA, ONTARIO 418 Laurier Avenue, West

QUEBEC CITY, P. Q. 330 St. Roch Street
 REGINA, SASKATCHEWAN 1076 Albert Street
 REXDALE, TORONTO, ONTARIO 13 Racine Road
 SCARBOROUGH, TORONTO, ONTARIO 3559 St. Clair Ave. E.
 SHERBROOKE, CANADA 1550 King Street, West
 VANCOUVER 10, B. C. 167 West 2nd Ave.
 WINDSOR, ONTARIO 3950 Malden Road
 WINNIPEG 10, MANITOBA 955 Portage Ave.

AUTHORIZED SERVICE STATIONS

ALABAMA, Montgomery
 ALASKA, Anchorage
 Fairbanks
 ARIZONA, Tucson
 CALIFORNIA, Fresno
 Stockton

CONNECTICUT, New Haven
 DELAWARE, Wilmington
 FLORIDA, Pensacola
 IDAHO, Boise, Lewiston
 INDIANA, South Bend

MAINE, Westbrook
 MINNESOTA, Moorhead
 MISSISSIPPI, Jackson
 MONTANA, Billings
 NEVADA, Reno
 NORTH CAROLINA, Raleigh

OHIO, Youngstown
 PENNSYLVANIA, Allentown
 Erie
 SOUTH CAROLINA, Charleston
 Columbia
 SOUTH DAKOTA, Rapid City

TEXAS, Corpus Christi
 El Paso, Harlingen
 Lubbock
 VIRGINIA, Roanoke
 WASHINGTON, Yakima
 WEST VIRGINIA, Wheeling

THE BLACK AND DECKER MANUFACTURING CO. TOWSON, MARYLAND 21204